

Balance Sheet

Hyde County Finance
 As of 09/30/2012
 Selecting on FUND equals 71

ACCOUNT NUMBER DESCRIPTION	CURRENT YEAR		PREVIOUS YEAR	
	DEBIT	CREDIT	DEBIT	CREDIT
Fund 71 (WEST-QUARTER)				
Assets				
711010.0000 BANK/WEST-QUARTER	6,502.23		6,080.57	
711080.0000 INVESTMENT	<u>14,608.45</u> CD		14,572.72	
711100.0000 ALLOWANCE FOR DOUBTFUL TX		100.00		100.00
711100.9902 TAXES RECEIVABLE 2001	0.33		0.33	
711100.9903 TAXES RECEIVABLE 2002	0.33		0.33	
711100.9904 TAXES RECEIVED 2003	1.33		1.33	
711100.9905 TAXES RECEIVABLE 2004	1.33		1.33	
711100.9906 TAXES RECEIVALBE 2005	18.83		18.83	
711100.9907 TAXES RECEIVABLE 2006	18.83		20.83	
711100.9908 WQ TAXES RECEIVABLE 2007	19.83		19.83	
711100.9909 WQ TAXES RECEIVABLE 2008	14.56		16.06	
711100.9910 TAXES RECEIVABLE 2009		729.80		96.99
711100.9911 TAXES RECEIVABLE 2010	50.26		50.26	
Totals for Current Assets	21,236.31	829.80	20,782.42	196.99
Total Assets	<u>20,406.51</u>		<u>20,585.43</u>	
Liabilities				
712810.0000 RESERVE FOR TAXES REC.	704.17		67.86	
Totals for Long Term Liabilities	704.17		67.86	
Total Liabilities	704.17		67.86	
Fund Balances				
712990.0001 FUND BALANCE UNAPPROPRIATED		21,108.68		20,788.87
Totals for Fund Balances		<u>21,108.68</u>		20,788.87
Total Fund Balances		21,108.68-		20,788.87-
Excess of Revenue over Expenditure		2.00		135.58-
Total Liabilities and Fund Balance		<u>20,406.51</u>		<u>20,585.43</u>

F-40 HEAVY DUTY DRAINAGE GATE

- CAST IRON CONSTRUCTION
- AUTOMATIC OPERATION
- 40 FOOT SEATING HEAD MAXIMUM
- SQUARE AND RECTANGULAR OPENING
- STAINLESS STEEL STUDS, NUTS AND PINS
- FLATBACK
- ADJUSTABLE LINKAGE
- CAST IRON OR BRONZE SEATS
- GALVANIZED STEEL LINKS
- BRONZE HINGE BUSHINGS
- MINIMUM 2½° SEAT

The Waterman Model F-40 Cast Iron Automatic Drainage Gate has a cast iron frame and cover (flap) with machined finished seating surfaces. A minimum 2½° seating angle and double pivoted links assure positive seating.

Hinge brackets, which can easily be field adjusted, allow the gate to be set for a very sensitive opening under low unseating pressure. Out-flow at practically full conduit capacity can be obtained.

Standard features include bronze hinge bushing, stainless steel hinge pins, studs and nuts with brass retainer washers and stainless steel spring pins. Links on all gates are flame cut from steel plate, then galvanized.

A lifting eye is cast as a part of the cover for hand operation.

Optional features available include bronze or stainless steel seats, monel or brass hinge pins, studs and nuts; graphite impregnated bronze bushings and lubrication fittings - or any combination thereof.

Standard shopcoat paint is an asphaltic base dipping enamel. All special coatings are available and include Epoxy and Coal Tar Paints or total galvanizing per ASTM A-123.

Anchor bolts are not included and should be ordered separately. Anchor bolts of galvanized steel, stainless steel, brass or monel are available as well as stainless steel machine bolts and tap-in expansion anchors.


Optional:

- Monel Studs, Nuts and Pins
- Coal Tar, Epoxy, and other Special Coatings including Total Galvanizing
- Stainless Steel, Ductile Iron or Manganese Bronze Hinge Links







FLATBACK F-40f

PARTS LIST	
No.	Name
1	FRAME (FLATBACK)
2	HINGE PINS
3	PIVOT LUG
4	STUDS & STUD NUTS
5	COVER (FLAP)
6	HINGE LINK
7	WASHER
8	RETAINING SPRING PIN
9	BUSHING
10	SET SCREW

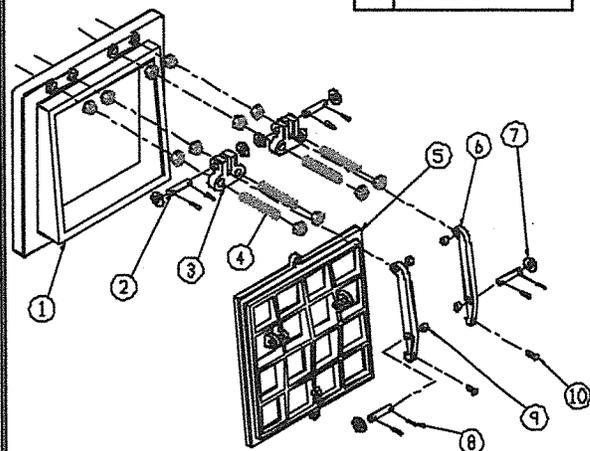

40-f DRAINAGE GATE

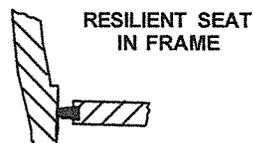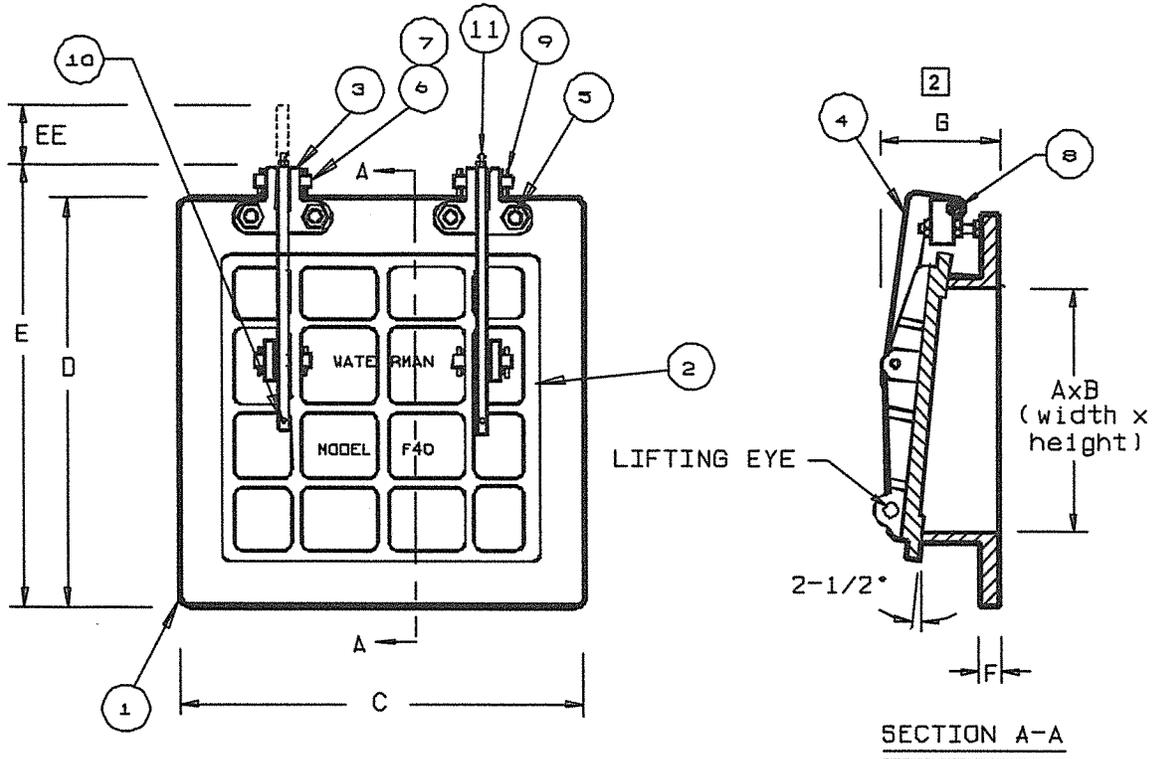

- 1. For use with seating heads up to 40 feet.
- 2. If grout pad mounting is used, add grout thickness to dimensions.

PARTS LIST	
No.	Name
1	FRAME
2	COVER
3	PIVOT LUG
4	HINGE LINK
5	HINGE STUDS & NUTS
6	HINGE PIN
7	HINGE BUSHING
8	WASHERS
9	SPRING PIN
10	SET SCREW
11	LUBE FITTING (non-corrosive)

GATE DIMENSIONS IN INCHES

A X B	C	D	E	EE	F	G
24 X 24	35	35	37	3½	1	8¼
30 X 30	38½	38½	40½	3½	1⅞	8
36 X 24	47	35	37	3½	1¼	10
36 X 36	45	45	47	3½	1½	12
42 X 42	53	53	55	4¼	1½	13
48 X 36	59	47	49	3½	1½	12
48 X 48	58	58	62	5	1½	10
54 X 36	65	47	49	3½	1½	11
54 X 54	65	65	69	6	1½	13
60 X 30	71	41	43	3½	1½	11
60 X 36	71	47	49	3½	1½	13
60 X 60	71	71	75	6	1½	13
72 X 72	84	84	88	10	1¾	15
84 X 84	96	96	100	10	1¾	15
96 X 96	108	108	112	10	2	20
96 X 120	112	136	142	11	2	20
108 X 108	124	124	130	11	2	20
120 X 120	136	136	142	11	2	20

NOTE: FOR PRELIMINARY DESIGN PURPOSES ONLY
DO NOT USE FOR INSTALLATION
UNLESS PART OF CERTIFIED & APPROVED SUBMITTAL